

CECOMefiag


Built stronger to last longer

- ▶ Minimal maintenance
- ▶ Capacity up to 60 m³ per hour
- ▶ Filter assembly can be removed in its entirety
- ▶ Large sludge holding capacity
- ▶ Easy to operate
- ▶ Operation temperatures up to 90° C
- ▶ Environmentally friendly



CECO
ENVIRONMENTAL


SERIES 11000 / 15000

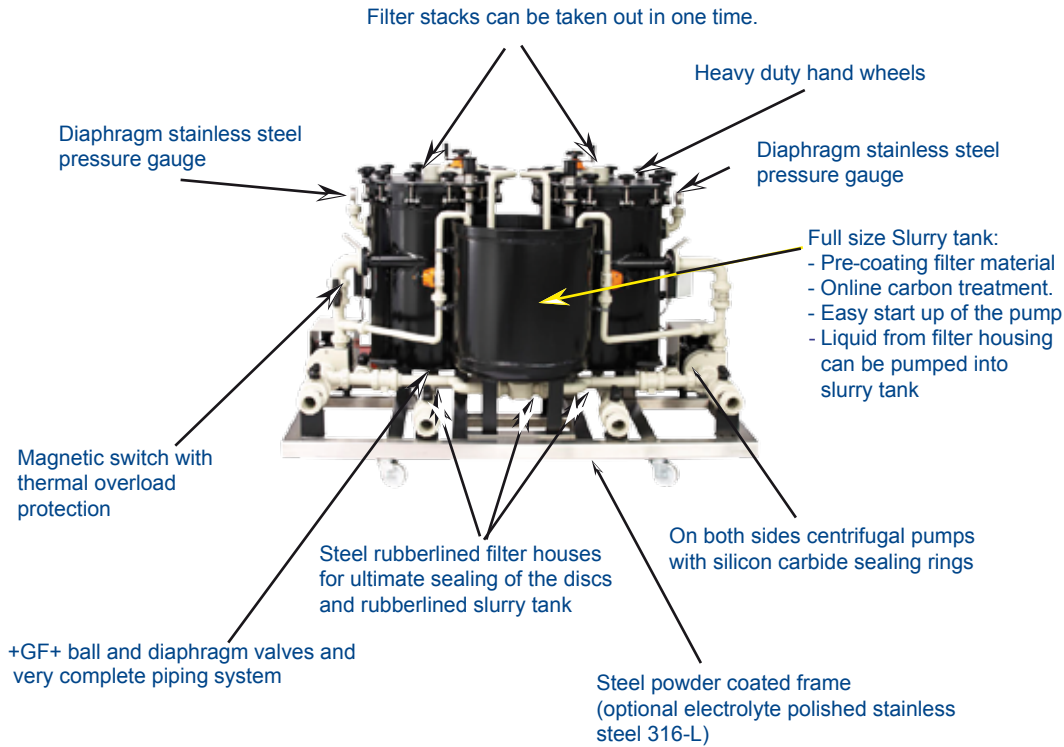

MP-12



Disc Filter Assembly

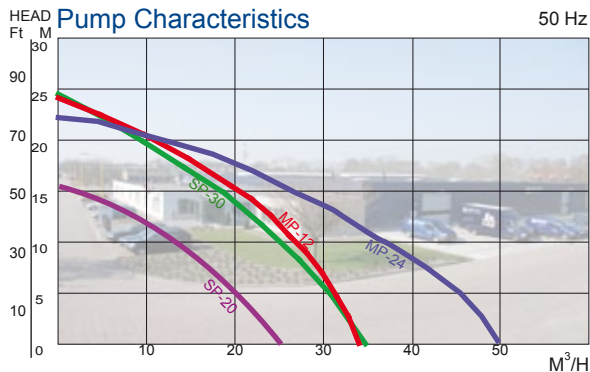

This "simple to operate" filter unit can be equipped with different types of pumps and has a capacity up to 60.000 litres per hour. Depending on the required capacity, the following pumps are available

Pump	Capacity	kW.	Voltage	Amps.
SP-20	2x20m ³ /h	2x1,5	230/400	6,1/3,5
SP-30	2x30m ³ /h	2x3,9	230/400	11,0/6,4
MP-12	2x30m ³ /h	2x2,2	230/400	8,5/4,9
MP-24	2x40m ³ /h	2x2,2	230/400	14,0/4,9



SP-20

	11000/15000 Disc Filter	11200/15200 Disc Filter
Max. temperature	90°C	90°C
Disc dimension	470/60 mm (high)	470/60 mm (low)
Number of filter discs	2x34	2x49
Capacity	2x20-25m ³ /hour	2x30m ³ /hour
Filter medium	paper / cloth	paper / cloth
Filter surface area	2x5,8m ²	2x8,3m ²
Sludge holding capacity	2x80 litres	2x68 litres
Content filter housing	2x220 litres	2x220 litres
Content slurry tank	170 litres	170 litres
Length	2010 mm	980 mm
Width	1250 mm	800 mm
Height	1396 mm	1396 mm



11000-SY

Inlet:	d63 / DN50	Outlet:	d63 / DN40
Drain:	d32 / DN25	Air-release:	d20 / DN16

Information in this leaflet can be subject to change without prior notice