

# CECO Mefiag

Built stronger to last longer

- ▶ Minimal maintenance
- ▶ Capacity up to 15 m<sup>3</sup> per hour
- ▶ Filter assembly can be removed in its entirety
- ▶ Very corrosion resistant
- ▶ Easy to operate
- ▶ Operation temperatures up to 90° C
- ▶ Environmentally friendly
- ▶ Long time between filter material changes






SP-0600-CRS



MP-10Q



V-20-60

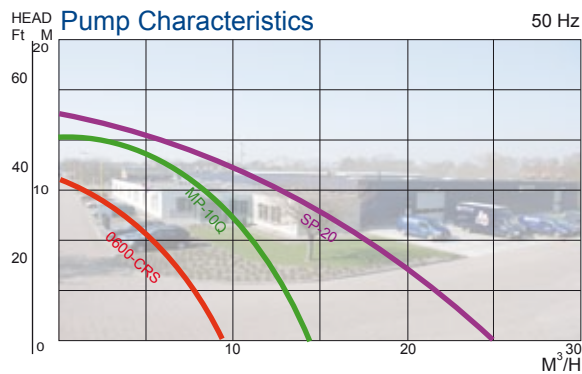

This "simple to operate" filter unit can be equipped with a variety of pumps with capacities up to 15.000 litres per hour. Depending on the required capacity, the following pumps are available

Pump	Capacity	kW.	Voltage	Amps.
SP-0600-CRS	6m <sup>3</sup> /h	0,95	230/400	3,2/1,85
MP-10Q	10m <sup>3</sup> /h	0,75	230/400	3,0/1,7
SP-20	15m <sup>3</sup> /h	1,5	230/400	6,1/3,5

	V-08-10 Filter basket/bag	V-08-20 Filter basket/bag	V-08-35 / V-20-35 Filter basket/bag	V-08-60 / V-20-60 Filter basket/bag
Max. temperature	90°C	90°C	90°C	90°C
Disc dimension	205/32 mm	205/32 mm	205/32 mm	294/64 mm
Filter medium	"Spaghetti"	"Spaghetti"	"Spaghetti"	"Spaghetti"
Contents basket	10 litres	20 litres	35 litres	60 litres
Weight of "Spaghetti"	0,7 kg	11,4 kg	2,5 kg	4,2 kg
Content filter housing	16 litres	30 litres	51 litres	88 litres
Content slurry tank	10 litres	17 litres	39 litres	88 litres
Length	500 mm	500 mm	810 mm	770 mm
- with slurry tank	850 mm	850 mm	1095 mm	1140 mm
Width	350 mm	350 mm	498 mm	540 mm
Height	1001 mm	1151 mm	1117/1210 mm	977/1341 mm

Inlet: d32 / DN25 to d50 / DN40\*  
Drain: d25 / DN20

Outlet: d32 / DN25 to d40 / DN32\*  
Air-release: d20 / DN16



V-20-35-SY